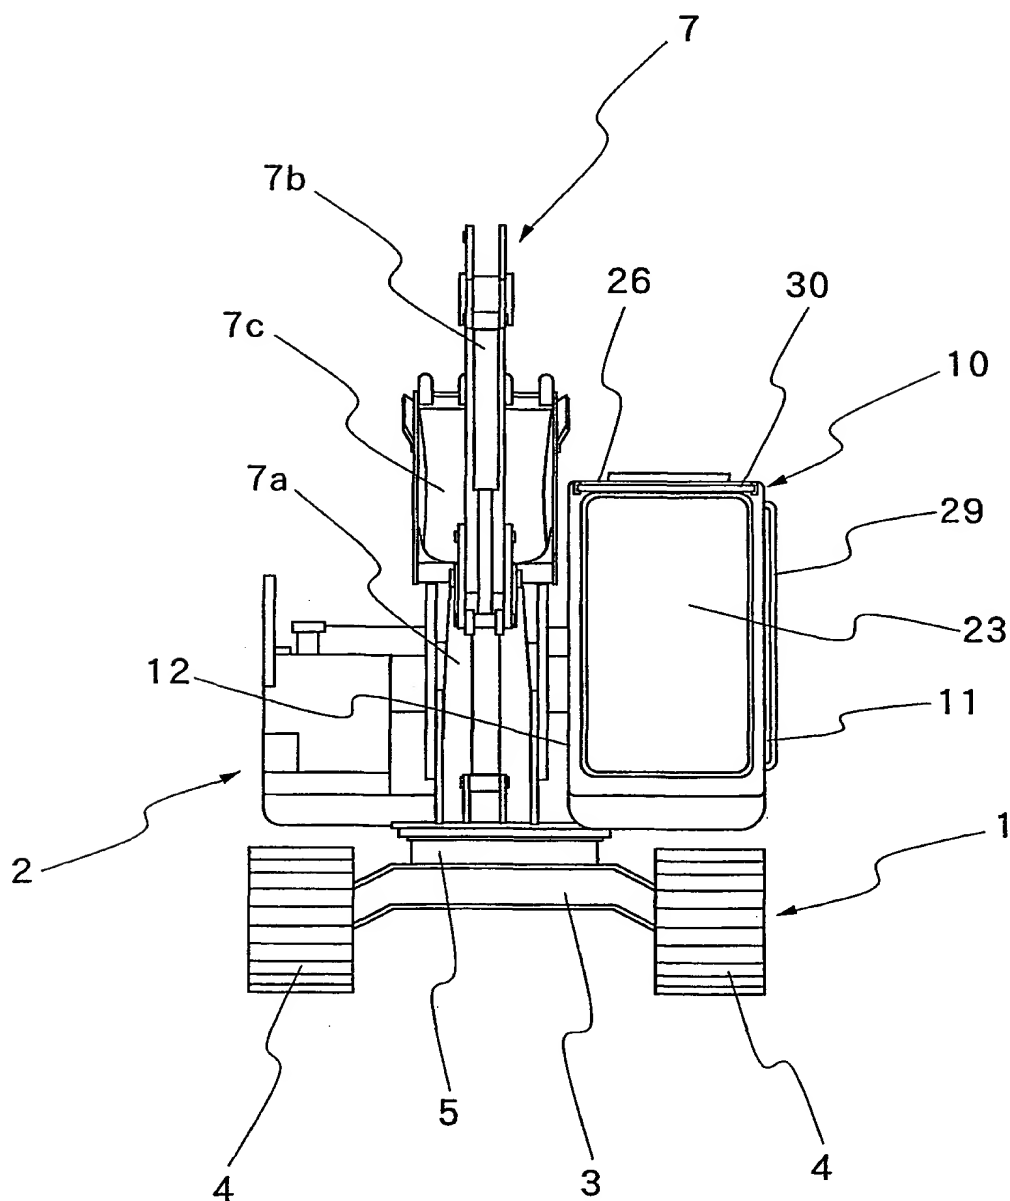


FIG. 1



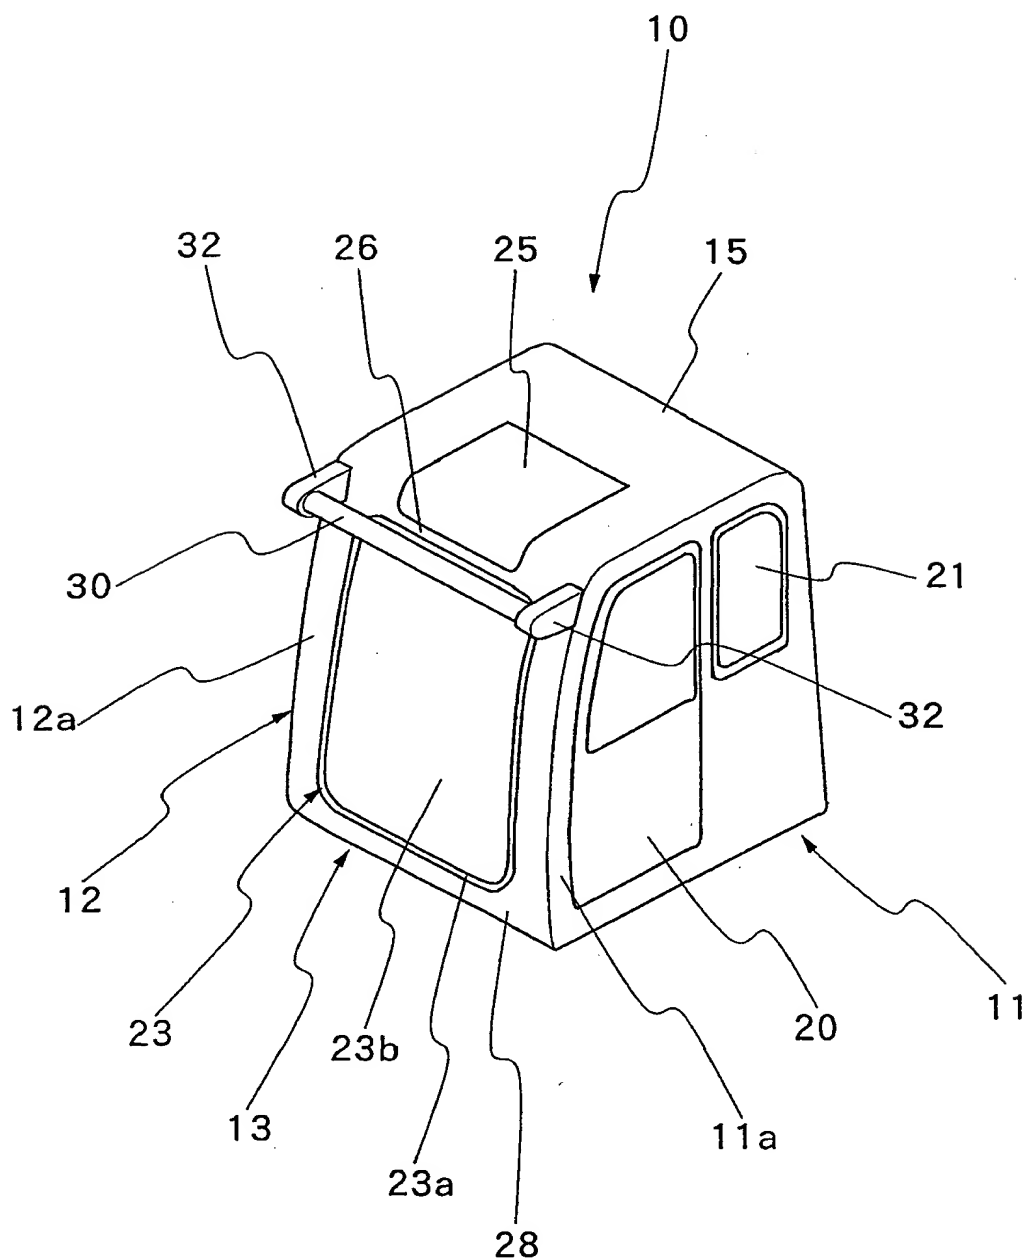


FIG. 4

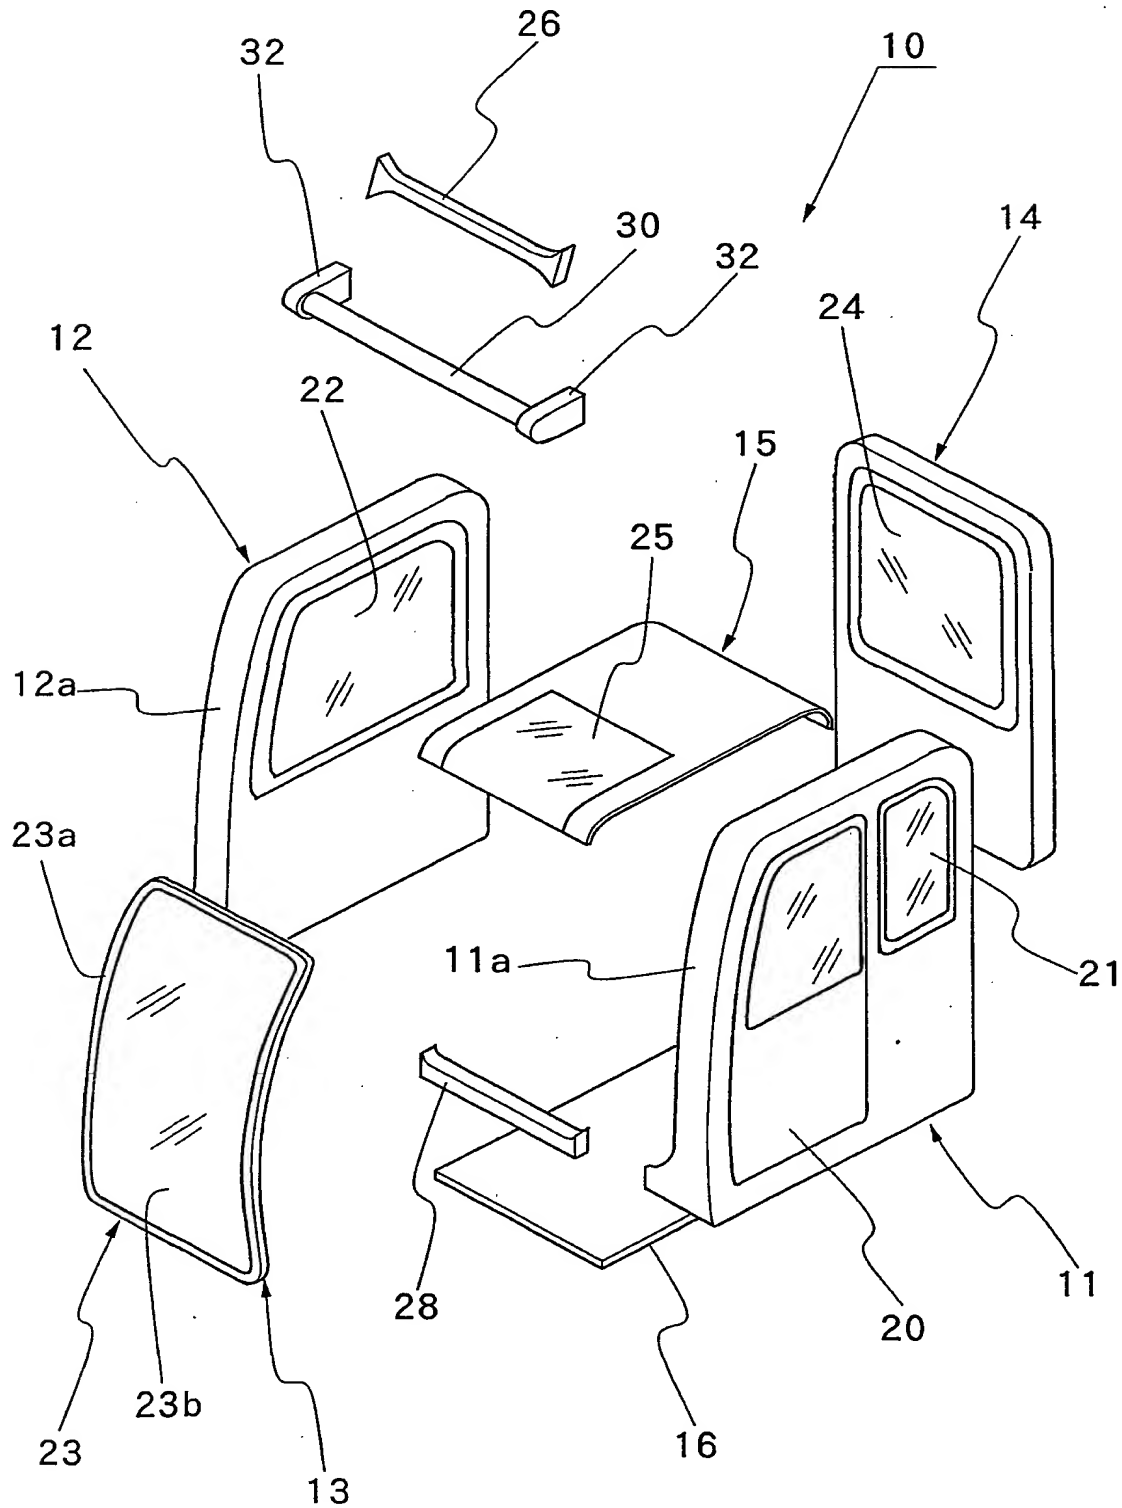


FIG. 5

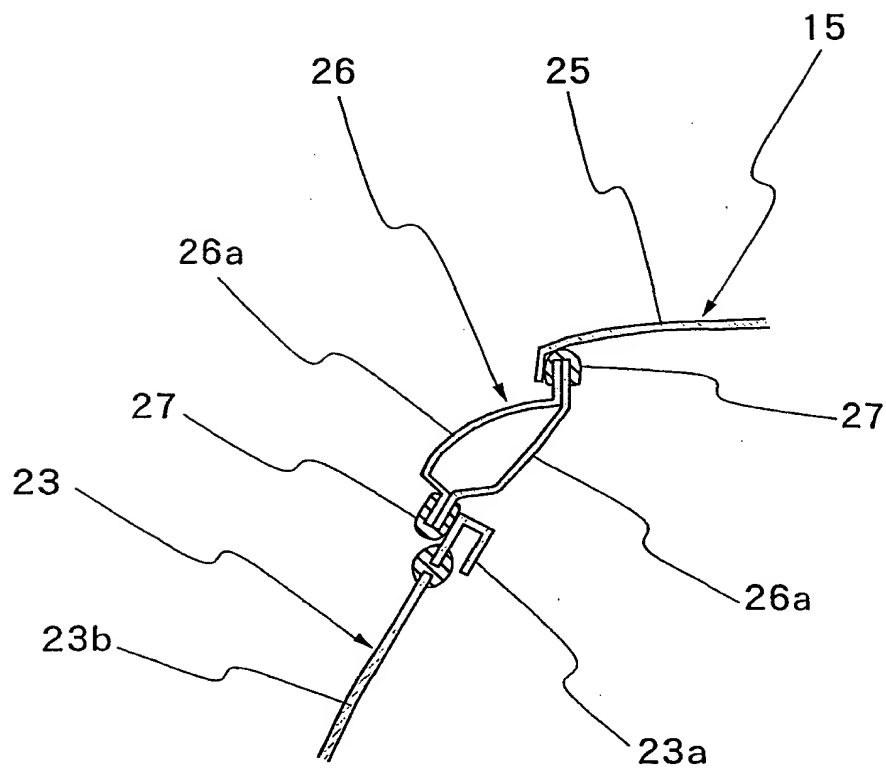


FIG. 5

FIG. 6

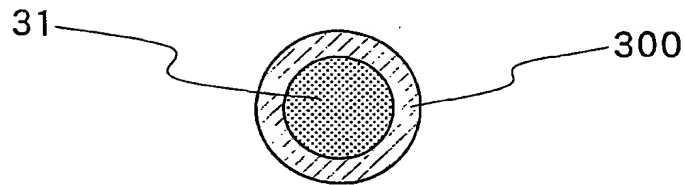


FIG. 7

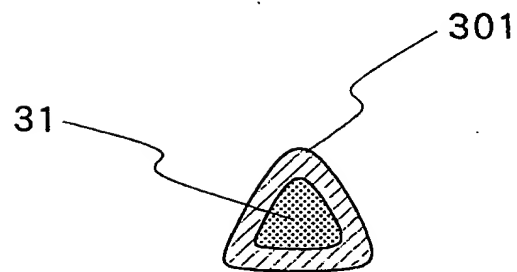


FIG. 8

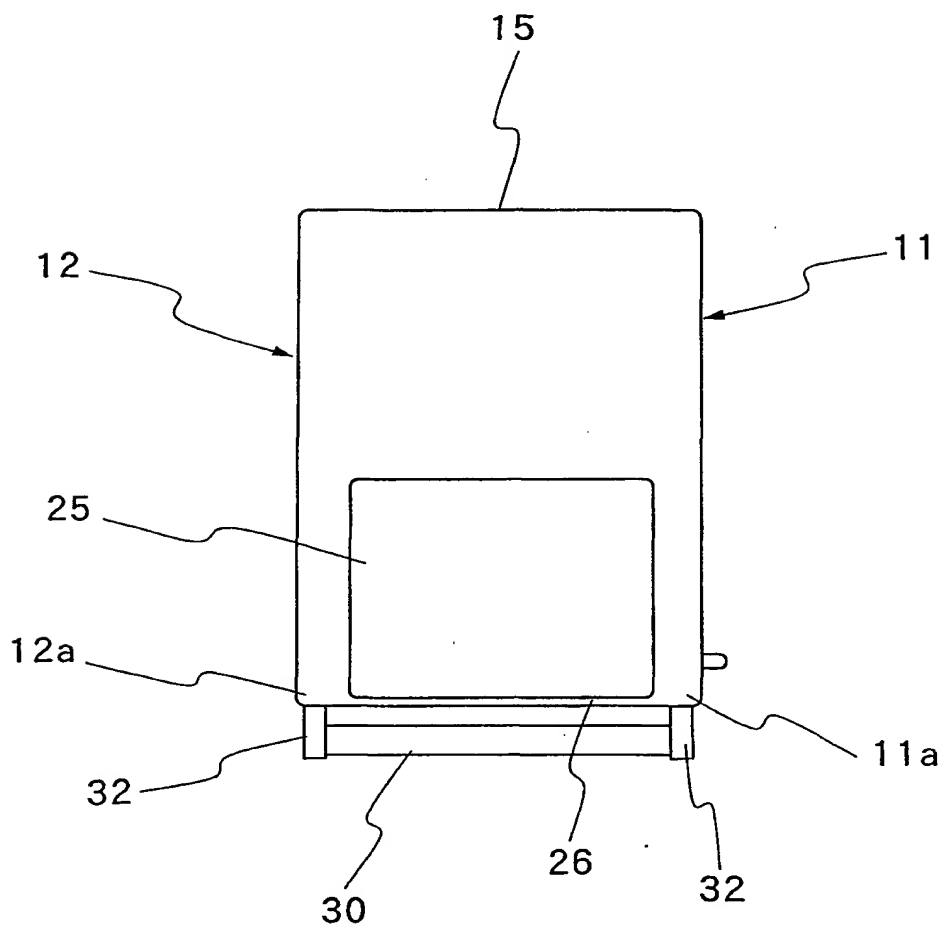


FIG. 8

FIG. 9

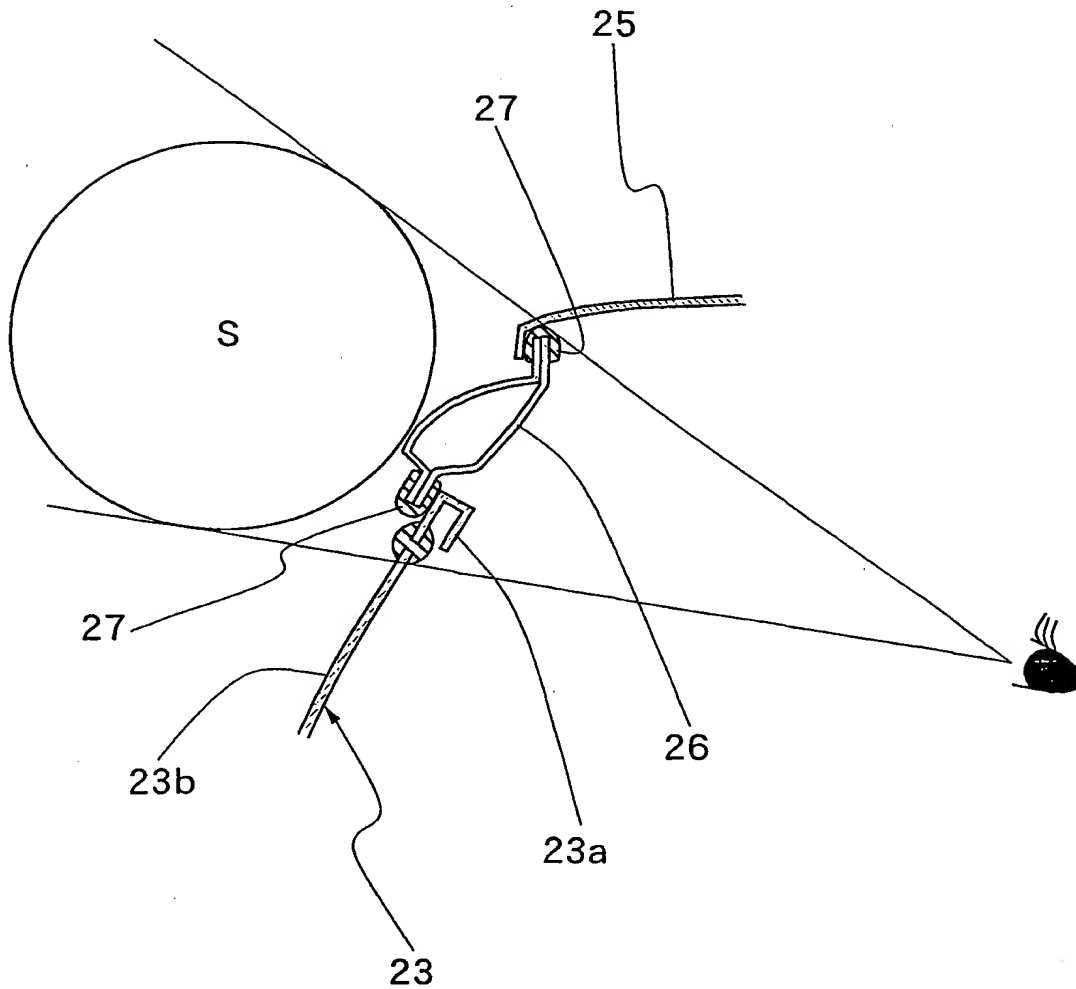


FIG. 9

FIG. 1 is a schematic diagram of a device 10 in a closed state. The device includes a main body 11 with a front face 12 and a rear face 15. A central opening 25 is visible. A latch 29 is located on the right side of the front face. A base 30 is positioned below the front face, with a layer 26 between them. The base has side flanges 12a and 11a, and a bottom flange 132.

FIG. 12


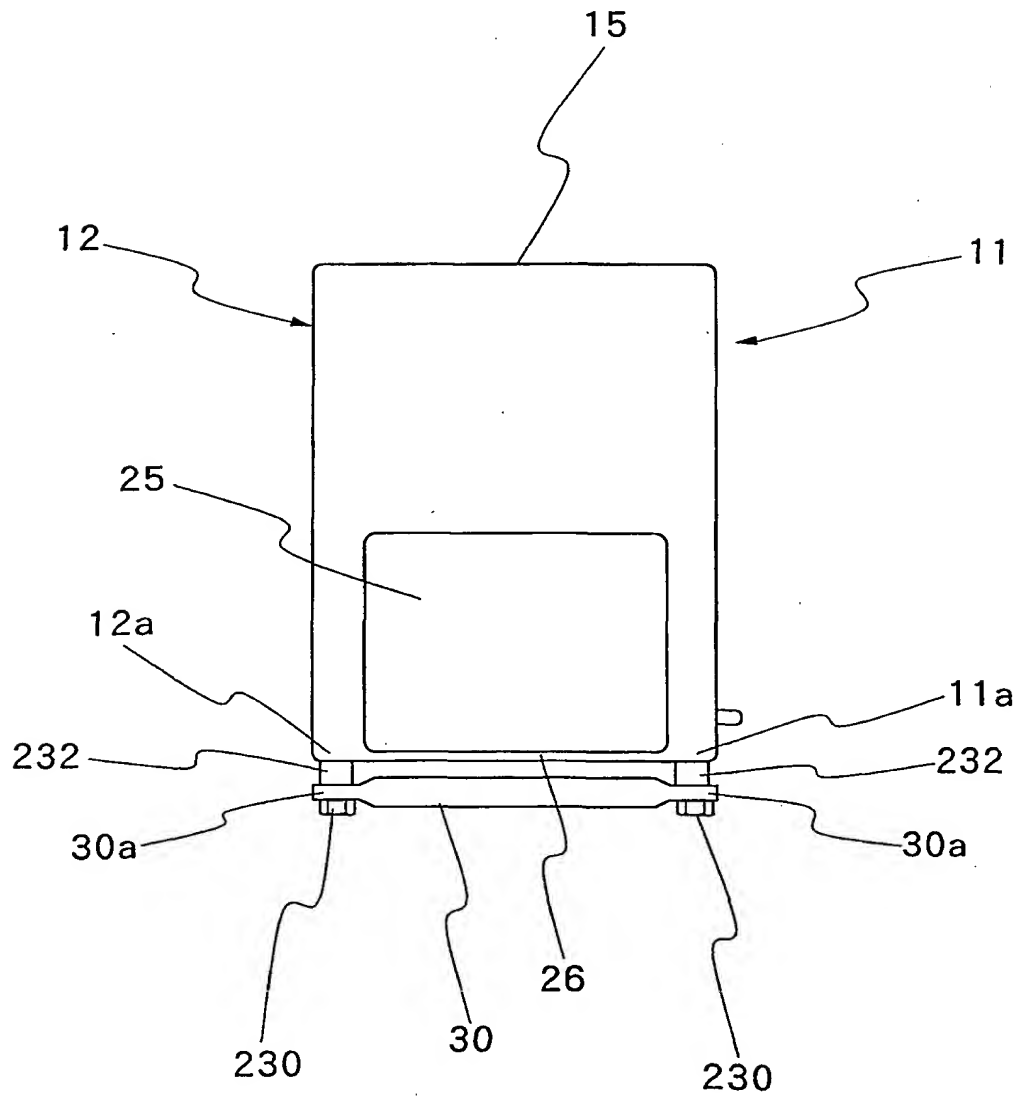


FIG. 13

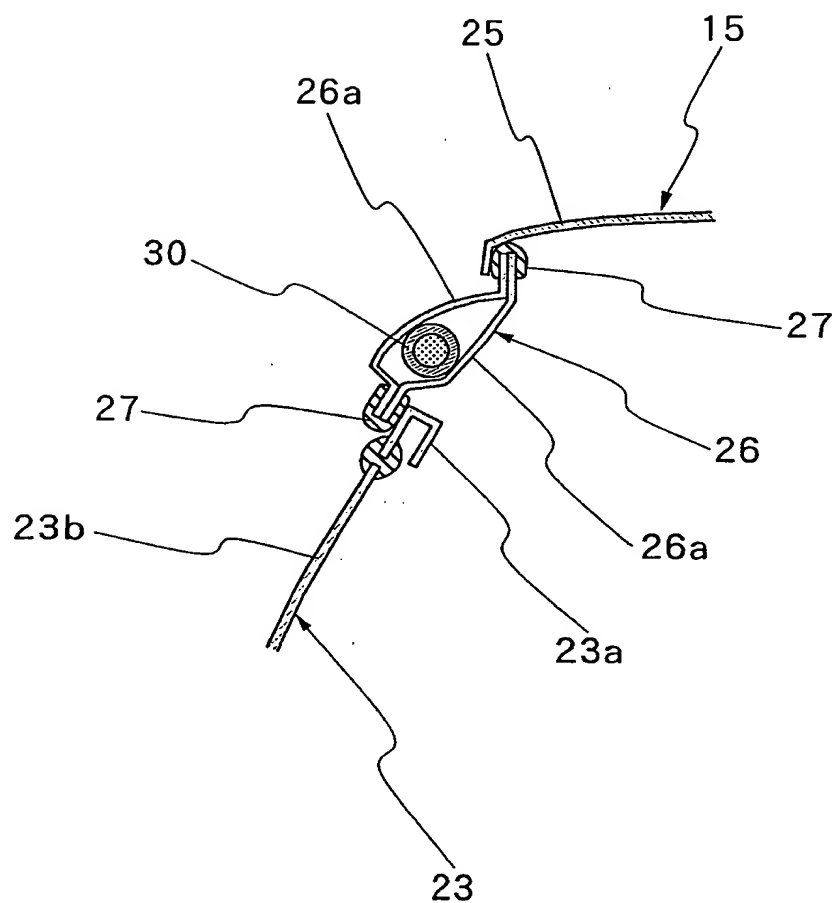

09/926636-1201
FIG. 13

FIG. 14

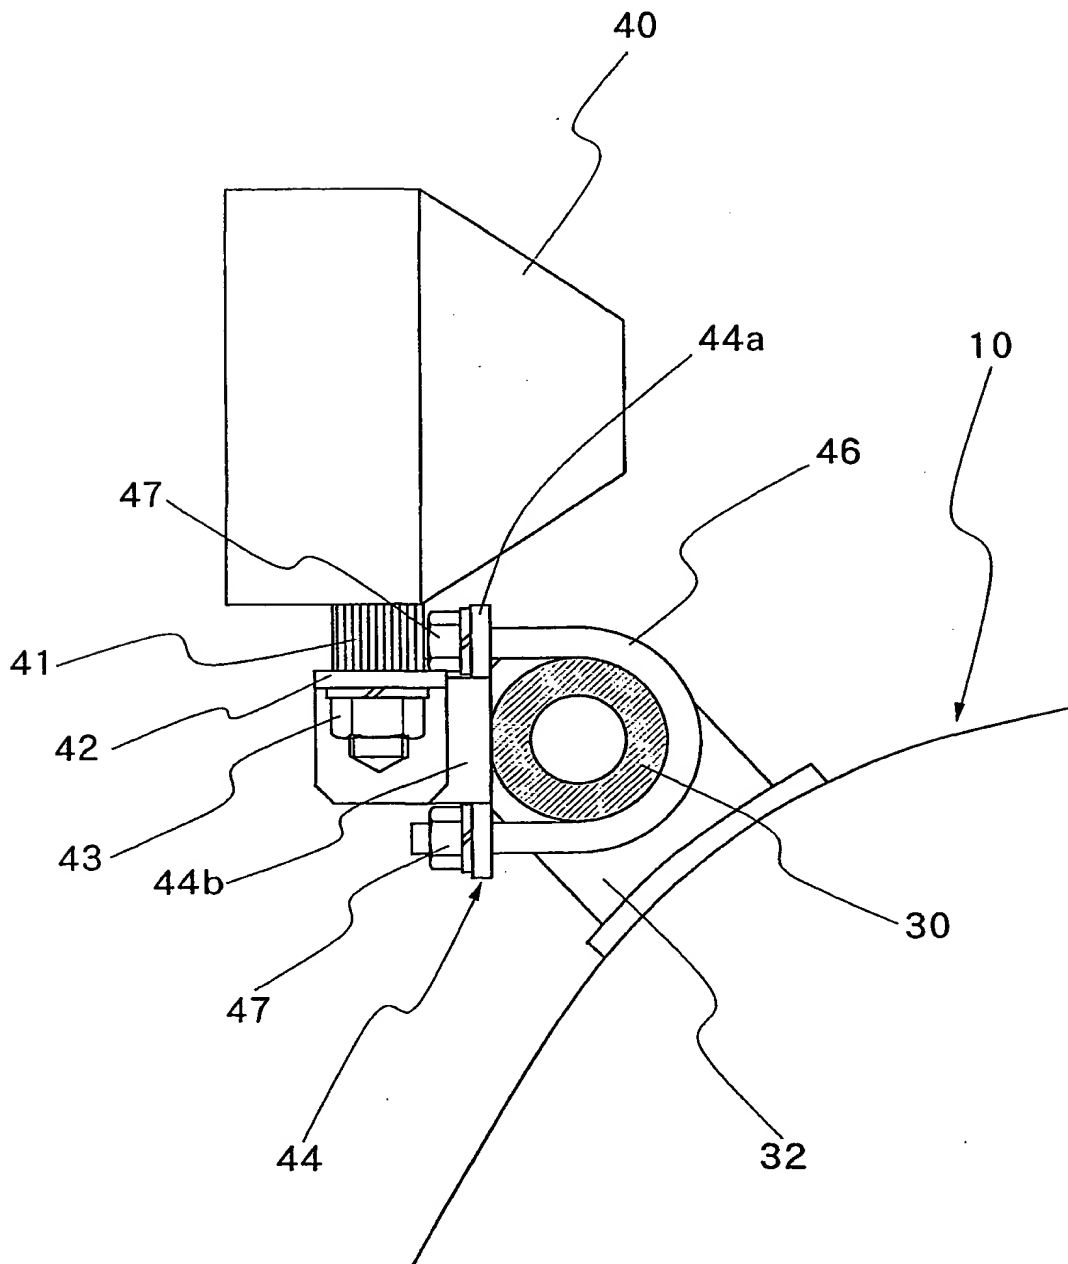


FIG. 14

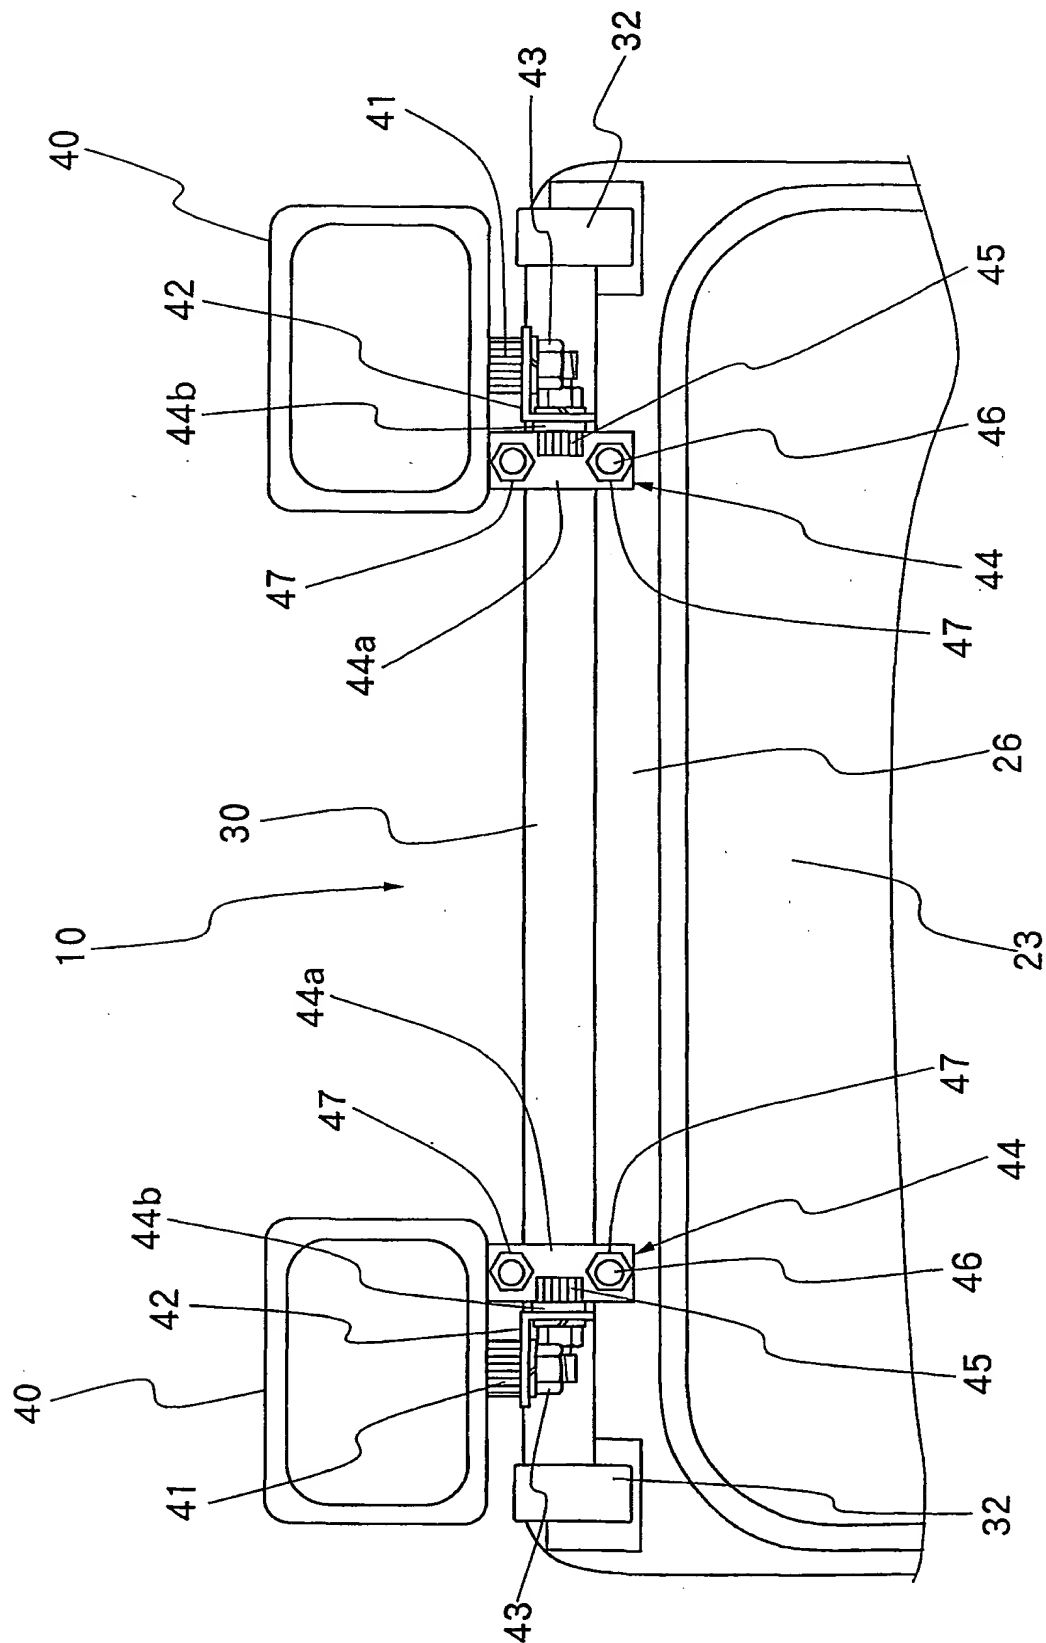


FIG. 15

[illegible]